


EXPRESS AUTO - Fully Automatic Torque Wrench Pumps



TITAN
Express
Auto Electric
 115V or 230V
 Automatic Cycling
Model EXE-4-AUTO

Maximum Oil Flow vs Pressure	Length	Width	Height	Weight
400 cu. in./min - (6.40L/min) @0-1000 psi (0-70 bar)	14"	18"	18"	46 lb
110 cu. in./min - (1.80L/min) @1000-2900 psi (70-200 bar)				
42 cu. in./min - (0.70L/min) @2900-10000 psi (200-700 bar)				
	34 cm	45 cm	45 cm	21 Kg

- 3 Stage
- Electric Power: 115V or 230V
- Motor: 3/4 HP (.6KW)
- Tank: 2 Gallon (7.6 Liter)
- Maximum pressure: 10,000 psi
- External Oil Cooler
- External Roll Cage
- 4-Tool Manifold
- 4-way valve

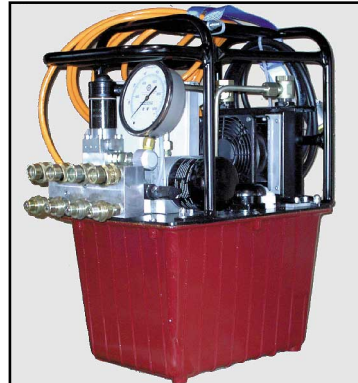

TITAN
Express
Whirlwind
Auto Electric
 115V or 230V
 Automatic Cycling
Model EXE-HP-4-AUTO

Maximum Oil Flow vs Pressure	Length	Width	Height	Weight
640 cu. in./min - (10.5L/min) @0-1000 psi (0-70 bar)	20"	15.7"	23.2"	66 lb
152 cu. in./min - (2.5L/min) @1000-2900 psi (70-200 bar)				
91 cu. in./min - (1.5L/min) @2900-10000 psi (200-700 bar)				
	51 cm	40 cm	59 cm	30 Kg

- 3 Stage
- Electric Power: 115V or 230V
- Motor: 1.5 HP (1.1 KW)
- Tank: 2 Gallon (7.6 Liter)
- Maximum pressure: 10,000 psi
- External Oil Cooler
- External Roll Cage
- 4-Tool Manifold
- 4-way valve

Torque Wrench Hoses
 Twin Line hose with
 Quick Disconnect Couplers

- Model: 090172 = 15 ft length
- Model: 090173 = 20 ft length
- Model: 090174 = 25 ft length
- Model: 090175 = 30 ft length
- Model: 090176 = 35 ft length



Torque Wrench Gauges

- 4" Glycerin Filled, 1/4" NPTM Bottom Mount
- Model 08055: Precision Liquid Filled Gauge
- Model 090228-14: 1/4% Accuracy w/Certificate
- Model 090058: 1/2% Accuracy w/Certificate



TITAN
 TECHNOLOGIES INTERNATIONAL, INC

Your Local TITAN Representative:

9001 Jameel St, Suite 180
 Houston, TX 77040
 Toll-Free: 866.345.8484
 Phone: 281.449.9994 • Fax: 281.449.9996
 Email: sales@titanti.com